PARTS LIST:			
Qty	Part Description	Qty	Part Description
1	Light Bar	1	Bottom Bracket Kit
1	Wiring Harness with Switch	1	Side Bracket Kit



LIGHT BAR



WIRING HARNESS




SWITCH



MOUNTING KIT

LIGHT INSTALLATION:

1. Install supplied brackets to light bar using M6 bolts and nuts.
2. Identify the desired mounting location for the lights on the vehicle. Place light bar and mark bracket hole locations on vehicle (If mounting hole requires drilling).
3. If mounting holes requires drilling, drill ¼" holes in locations marked.
4. Place rubber pad between bracket and vehicle; mount using 2 M8 bolts and M8 nuts. Once light bar is in desired location tighten all hardware.

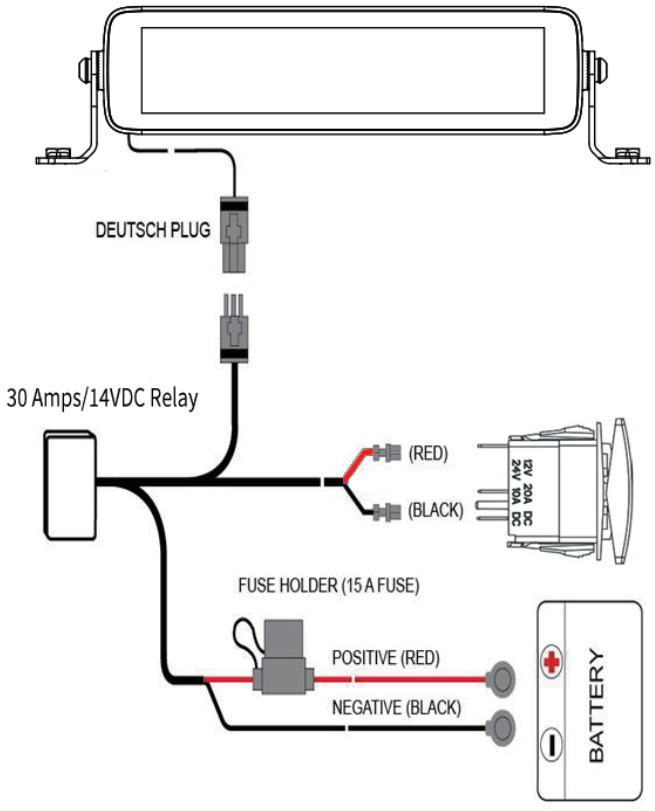

WIRING INSTALLATION:

1. Remove wiring harness from kit.

2. Route wiring harness so that the red and black power cables are routed to the 12V battery, and the Deutsch plug(s) is routed to the light. (**Keep wiring away from anything that will get hot**).

3. Mount relay with desired hardware in a position under hood or in cab that is limited to water exposure.

4. Plug male (on the wiring harness) and female (on light) Deutsch plug(s) connectors together.

5. Drill hole in desired switch mounting location. Verify there will be enough clearance behind switch to plug in the wires. Notch a small slit in the side of the hole using a file. This will keep the switch from turning.

6. Atach power cable to the battery. **Red** goes to **positive** and **black** goes to **negative.**

- Complete periodic inspections to the installation to make sure that all hardware is secure and tight.
- Never use a caustic or petroleum-based cleaner on any surface of the light.
- For best cleaning results, always use household glass cleaner or mild soap with a soft lint free rag.