



UNIVERSAL UTV BED RACK

I N S T A L L A T I O N I N S T R U C T I O N S

Thank you for purchasing the Open Trail® Universal UTV Bed Rack. This high-quality rack is designed to be adjustable to suit the needs of the consumer. The bed rack frame can be adjusted for height and width, while the bed rack basket can be adjusted for depth. Before you begin to assemble the bed rack, verify that all components are included in the box and read all instructions. If you have any questions or if you are missing any components, contact us at opentrailusa.com/contact-us.



WARNING: RISK OF SEVERE INJURY OR DEATH

- Read and understand all instructions before assembling, installing or using the Open Trail® Universal UTV Bed Rack. Failure to follow these safety guidelines may result in serious injury, death or property damage.
- This rack is designed for use on compatible off-road utility vehicles (UTVs). The end user must exercise caution, follow these and the UTV manufacturer's recommendations and use common sense when operating the vehicle with the rack installed to reduce the risk of personal injury and/or damage to equipment.
- DO NOT exceed the rack's maximum load capacity of 150 lbs (68 kg). Overloading may result in rack failure, causing injury, death or damage to your vehicle and cargo.
- DO NOT exceed your vehicle's bed box or bed rail payload ratings. Consult your UTV's operator manual for proper guidance.
- DO NOT exceed your vehicle's payload ratings. Consult your UTV's operator manual for proper guidance.
- Secure all cargo properly using high-quality tie-downs or straps rated for the load. Loose or shifting items can affect vehicle handling or fall off during movement.
- Center the load on the rack, making sure that the weight is evenly spaced and within the load capacity of the rack and the machine.
- DO NOT transport passengers, animals or flammable/pressurized materials on the rack.
- **WARNING:** A rollover can cause serious injury or death.
- Reduce speed and use extra caution when driving with the rack loaded. Avoid aggressive maneuvers and steep or off-camber terrain which may result in a rollover.
- **WARNING:** Any suspension modification may decrease the stability of the machine, increasing the chance of a rollover.
- The bed rack is not designed to be a Rollover Protection system.
- **IMPORTANT:** Adding wheel spacers in order to widen the machine's stance is highly recommended.
- Inspect the bed rack, including all mounting hardware, before each use. Check that the rack is securely fastened, free of damage and installed according to instructions. Do not use it if there are loose or damaged parts.
- Use only with vehicles designed to accept accessory racks. Improper fitment or use on non-compatible vehicles can compromise safety.
- Do not obstruct the driver's field of view, tail/brake lights or license plate.
- Before trailering with the rack attached, ensure legal compliance and clearance.
- All cargo must be secured to the rack.
- DO NOT use damaged or excessively worn products.
- DO NOT cut or modify the bed rack or mounting accessories.
- Be aware that adding the rack and load to the UTV will change the driving characteristics:
 - Raised center of gravity can make your vehicle more prone to rollovers, especially on hills, turns or uneven terrain.
 - Increased braking distance.
 - Installation may increase the overall height of the UTV. Take note of overhead clearance.
 - Use caution when lifting the cargo bed.

NOTE: These guidelines do not cover every possible situation. Always follow safe operating practices and refer to both the rack instructions and your vehicle's owner manual.

WHAT'S IN THE BOX*

Component	QTY
A Lower Leg	4
B Upper Leg	4
C Crossbar	2
D Outer Basket	2
E Inner Basket	1
F Molle Panel	2
G Carriage Bolt – M8 x 20	48
H Nylon-Insert Lock Nut	68
I Washer	76
J Carriage Bolt – M8 x 25	20

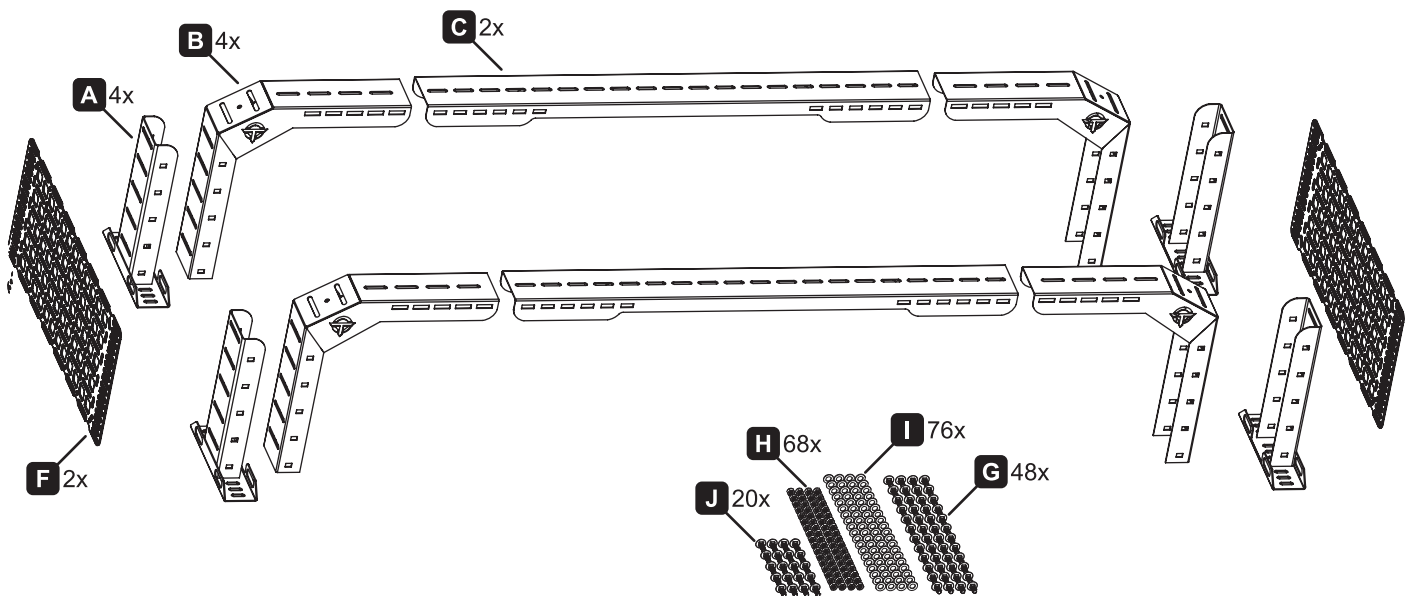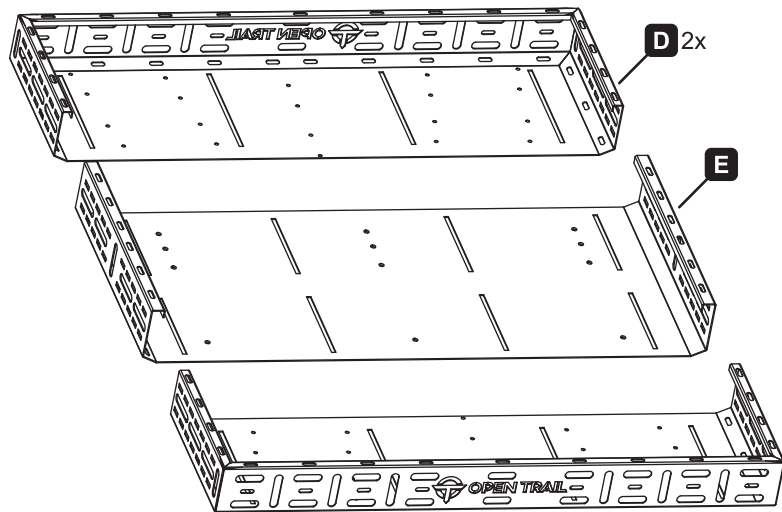

INSTALLATION TOOLS REQUIRED (not included)

- Tape measure
- Ratchet
- 13mm socket
- Torque wrench

*The Open Trail® Universal UTV Bed Rack does not come with the hardware to mount the rack to your UTV.

Compatible cargo mounting system hardware kits are available separately for purchase.

CFMOTO® Quick Attach: P/N 457-5007

Polaris® Lock & Ride® MAX: P/N 457-5008

Polaris® Lock & Ride® UTV: P/N 457-5009

Can-Am® LinQ® System: P/N 457-50100

Polaris® Lock & Ride® ATV: P/N 457-5011

Kawasaki® Ridge®: P/N 457-5012

INSTALLATION

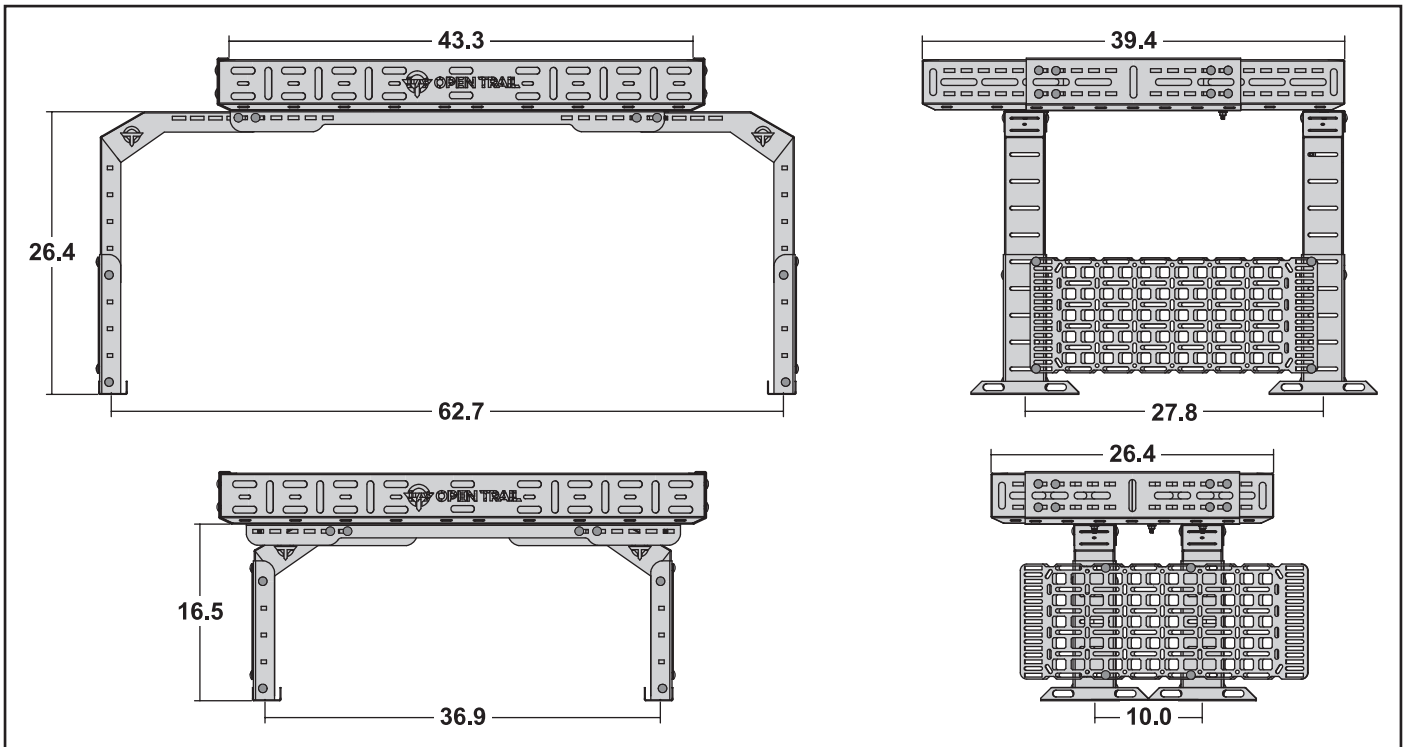


Figure 1. Minimum and maximum rack dimensions

1. Using a tape measure, measure the width and height you would like for the assembled rack frame (figure 1).

NOTE: In steps 2 and 3 make sure to maximize the separation of the hardware mounting points.

2. Place a lower leg and upper leg on a work bench. Using the 20mm carriage bolts (G), washers (I) and lock nuts (H), assemble the lower and upper leg at the height determined in step 1. Torque the nuts to 18 ft/lb. Repeat this step to complete the four leg assemblies (figure 2).
3. Loosely assemble two leg assemblies and one crossbar at the desired width using 20mm carriage bolts (G), washers (I) and lock nuts (H) (figure 3).

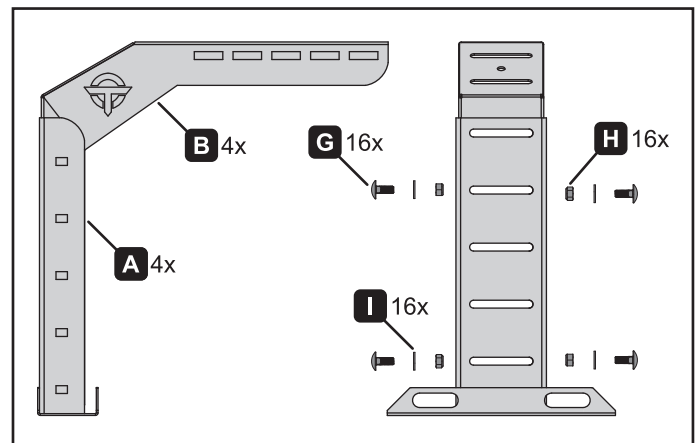


Figure 2. Leg assembly

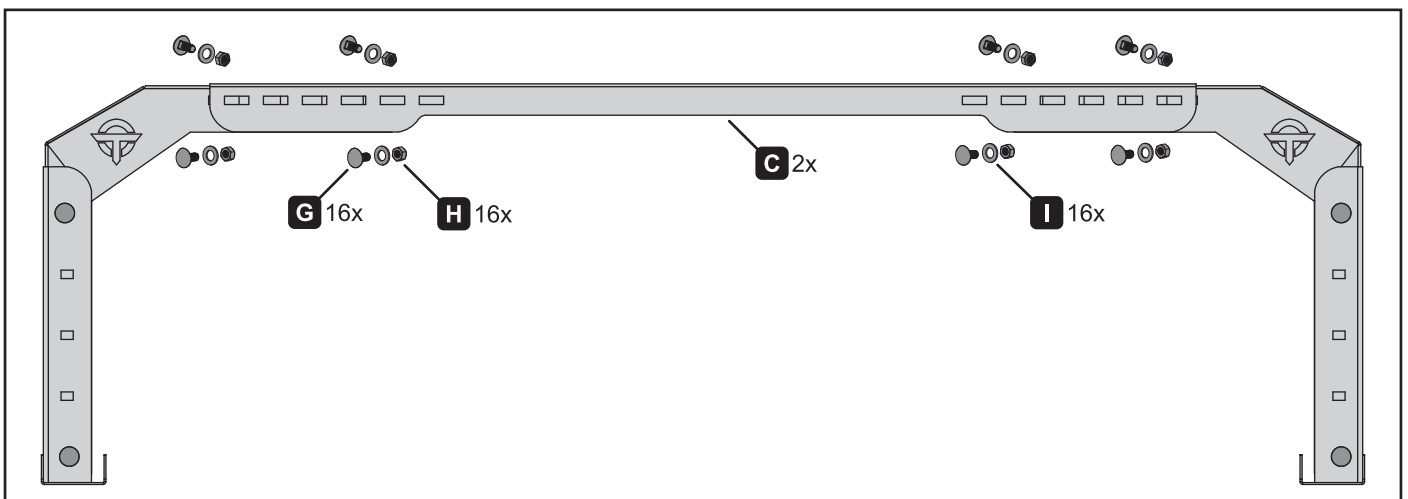


Figure 3. Frame assembly

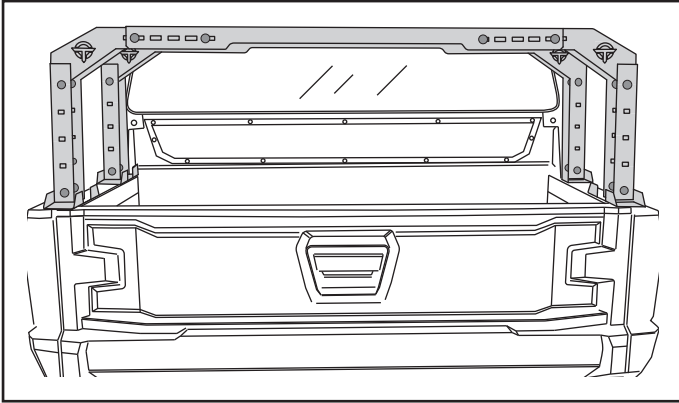


Figure 4. Frame mount – rear view

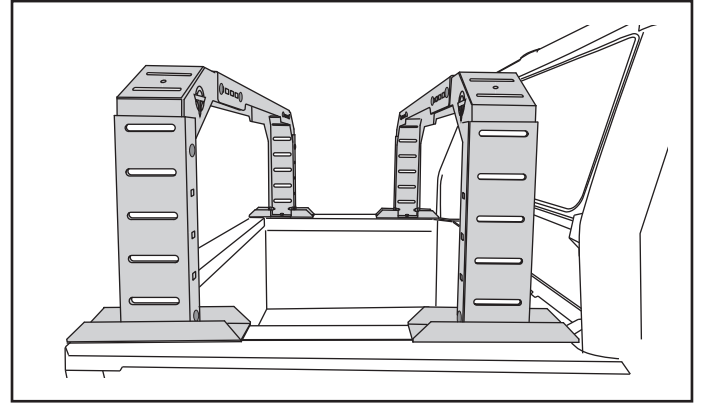


Figure 5. Frame mount – side view

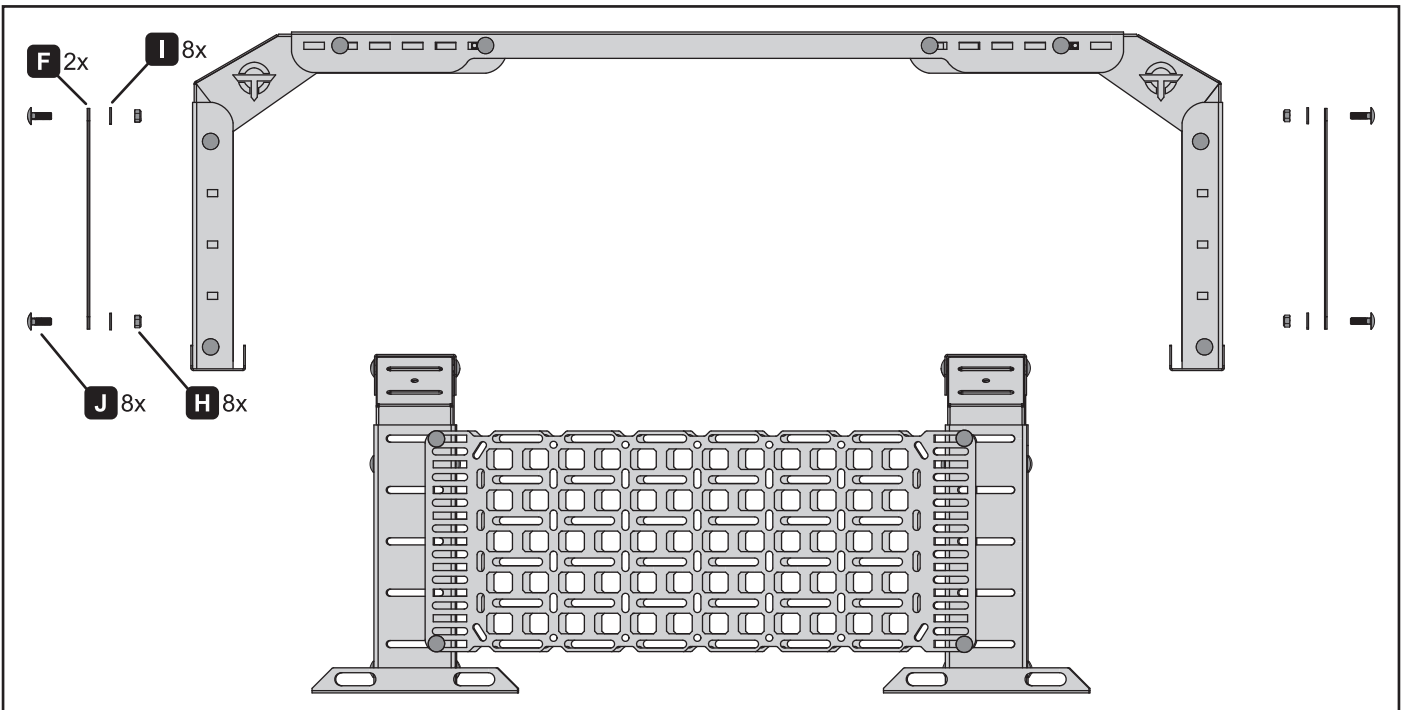


Figure 6. Molle panel installation

4. Install the cargo mounting hardware to the UTV bed.
Note: Compatible cargo mounting system hardware kits are sold separately.
 - CFMOTO® Quick Attach: P/N 457-5007
 - Polaris® Lock & Ride® MAX: P/N 457-5008
 - Polaris® Lock & Ride® UTV: P/N 457-5009
 - Can-Am® LinQ® System: P/N 457-50100
 - Polaris® Lock & Ride® ATV: P/N 457-5011
 - Kawasaki® Ridge®: P/N 457-5012
5. Install one frame assembly to the UTV at the predetermined location. Tighten the bed rack mounting hardware to the recommended specifications. Repeat the process for the second frame assembly (figures 4 and 5).
Note: Maximize the separation of the two frame assemblies as shown in figure 5.
6. Install the molle panels using 25mm carriage bolts (J), washers (I) and lock nuts (H). Torque the nuts to 18 ft/lb (figure 6). Repeat this process on the opposite side.

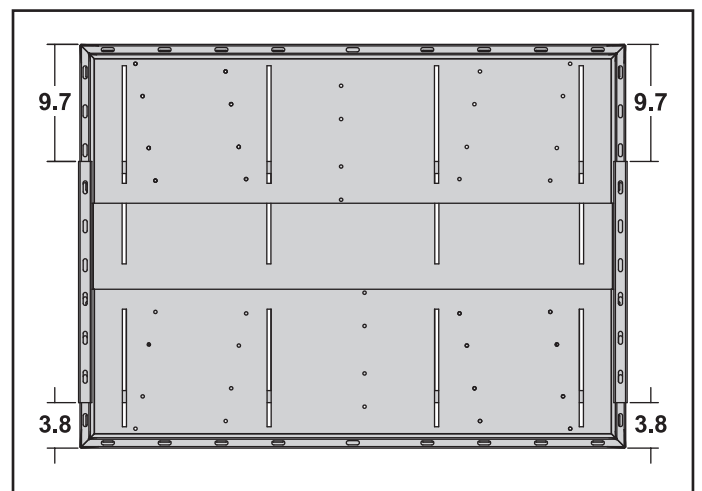


Figure 7.

Note: If installing the molle panel to the upper leg and lower leg, use a spacing washer (I) between the molle panel and the upper leg.

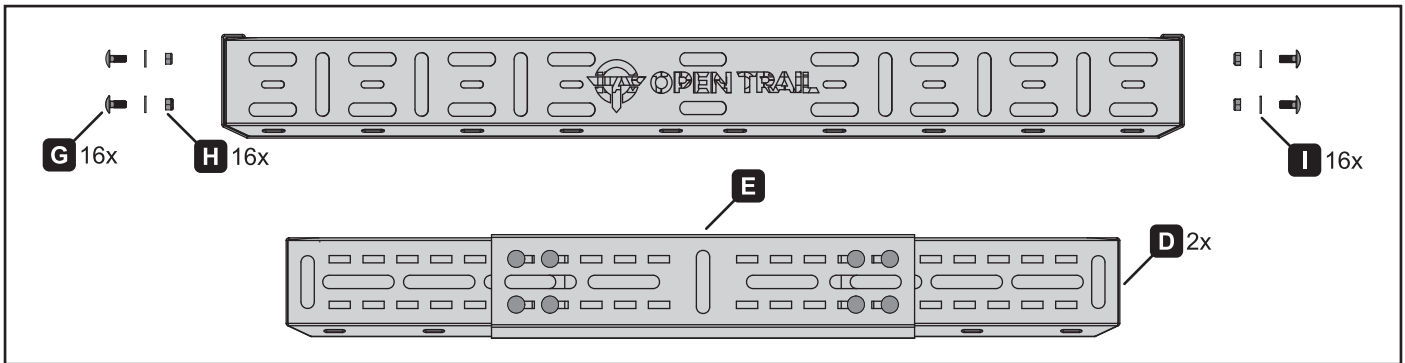


Figure 8.

7. Assemble the basket. The depth of the basket can be adjusted; use a tape measure to accurately measure the depth of the basket before attaching hardware. Find the desired depth; then use a tape measure to measure between the four corners of the outer basket and the edges of the inner basket, making sure that each basket side is parallel between the inner and outer basket. See figure 7 on preceding page.

Note: The measurements shown in figure 7 are for reference only.

8. Install 20mm carriage bolts (G), washers (I) and lock nuts (H) into the sides of the basket assembly as shown. Torque the lock nuts to 18 ft/lb (figure 8).
9. Basket installation is best performed by two people. Lift and carefully place the basket assembly onto the two frame assemblies. Measure the distance between the outer edge of the basket assembly to the face of the frame assembly on each side to ensure proper alignment (figure 9).

Note: The measurement shown in figure 9 is for reference only.

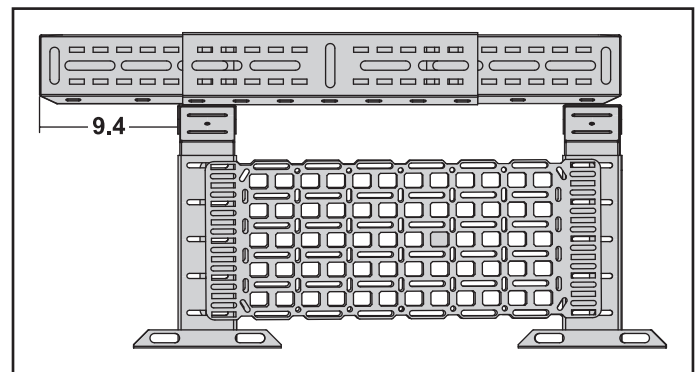


Figure 9.

10. Install the carriage bolts (J) through the slots in the basket and the slots in the frame assembly. Attach washers (I) and lock nuts (H) (figure 10). Torque the lock nuts (H) to 18 ft/lb.

Note: Adjusting the frame assembly may be necessary to align the basket slots with the slots in the frame.

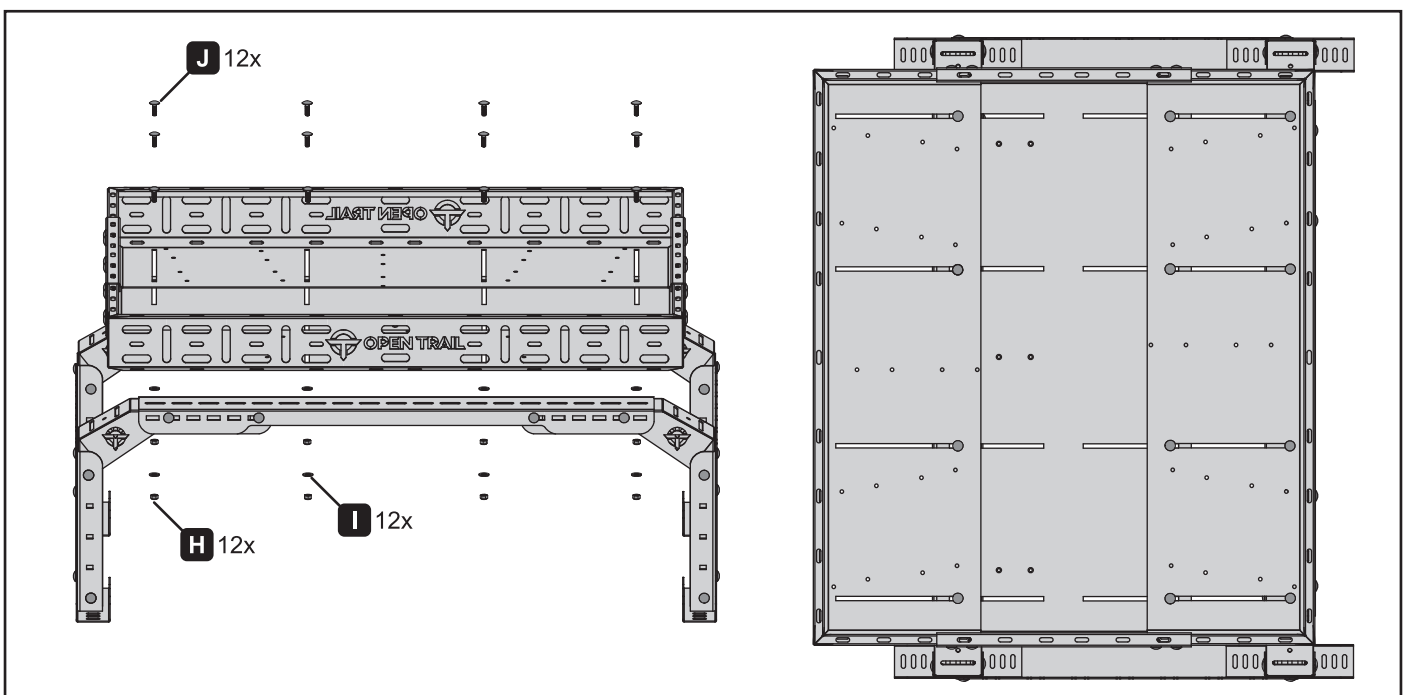


Figure 10.

11. Torque the lock nuts (H) that were loosely assembled in step 3 to 18 ft/lb.

LIMITED WARRANTY

Open Trail® Universal UTV Bed Racks are warranted against defects in manufacturing for **one (1) year** from the original retail purchase date. This limited warranty covers only the Open Trail® UTV Rack and its components, and applies **exclusively to the original purchaser**. This limited warranty is **non-transferable**.

Exclusive Remedy

This Limited Warranty is made as of the original date of product purchase and is not a warranty of future performance. If a manufacturing defect is confirmed within the warranty period, Open Trail will provide a **one-time replacement part** at no charge. Please note that **the replacement part will not be covered under warranty**.

Limitations and Exclusions

This warranty **does not cover**:

- Normal wear and tear
- Damage resulting from misuse, impact, or collision
- Improper assembly, installation, or maintenance
- Unauthorized modifications or alterations
- Use of the rack for transporting passengers, animals, or non-compatible cargo
- Failure to follow safety instructions, including overloading and improper tie-downs
- Cosmetic damage that does not affect structural integrity or function

This Limited Warranty is the only warranty, written or oral, express or implied, provided by Open Trail.

ALL IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS

FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

Any implied warranty which cannot be disclaimed under applicable law will be limited in duration to the shortest permissible term and, in any event, will not exceed the term of this express limited warranty.

IN NO EVENT WILL OPEN TRAIL BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES,

including, but not limited to labor charges, transportation costs, loss of time, loss of use, or damage to your ATV/UTV or other property. **IN NO EVENT WILL OPEN TRAIL'S LIABILITY EXCEED THE PRICE PAID FOR THE AFFECTED PRODUCT OR COMPONENT.** The limitations of warranty and liability set forth herein shall survive and apply even if the exclusive remedy set forth in this Limited Warranty is found to have failed of its essential purpose.

This warranty gives you specific legal rights and you may also have other rights that vary by state.

WARRANTY CLAIMS AND SERVICE

To initiate a warranty claim within the warranty period:

1. Contact your original **authorized dealer**, or
2. Visit **opentrailusa.com/contact-us** for support.

Open Trail may assist you in troubleshooting via phone or email. **Do not proceed with repairs or replacements without prior authorization** from Open Trail, as unauthorized actions may void your warranty.

The purchaser is responsible for all **transportation costs** and any **damage or loss during shipment** of parts submitted for warranty service.

If you have any questions or concerns regarding this warranty, please don't hesitate to reach out at **opentrailusa.com/contact-us**.